

ROTATING CLAMPING



**G I Z E T A
I M P I A N T I**

GI-ZETA IMPIANTI S.r.l.

25030 via Vanzago, 2 PARATICO (BS)
ITALIA

uff.commerciale@gizetaimpianti.it

www.gizetaimpianti.it


Ph. 035 917975 - Fax 035 917782

COMMERCIAL
CODE


SM SMEL 3 0001 BC

MAIN TECHNICAL FEATURES


Fluid	[/]	Air
Bore	[mm]	63
Stroke	[mm]	49
Weight	[kg]	4
Working position	[/]	Any
Rotation angle	[°]	90 (clockwise)
Max. working pressure	[bar]	10
Working temperature	[°C]	-20...+80
Max. Clamping force (6 bar)	[N]	1416
Max. Release force (6 bar)	[N]	1352

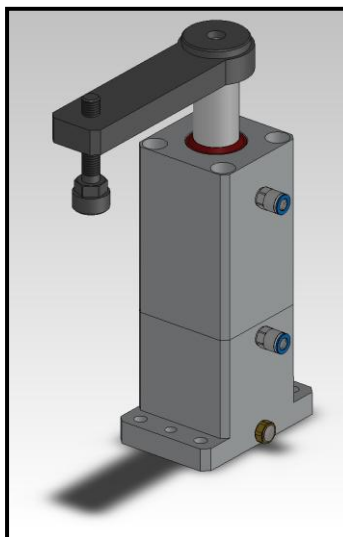

1 - OPEN

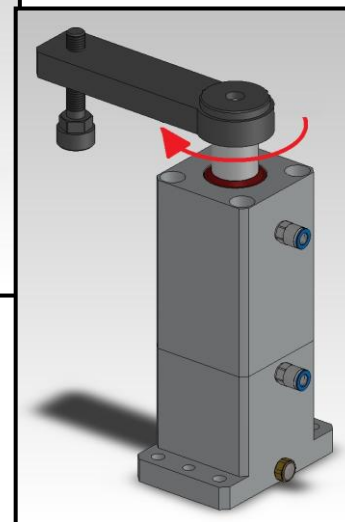


2 - ROTATED

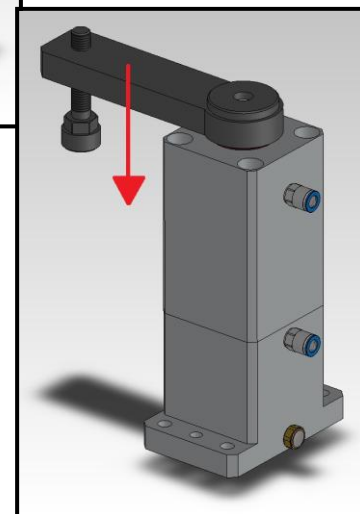


3 - LOCKED

DIMENSIONS

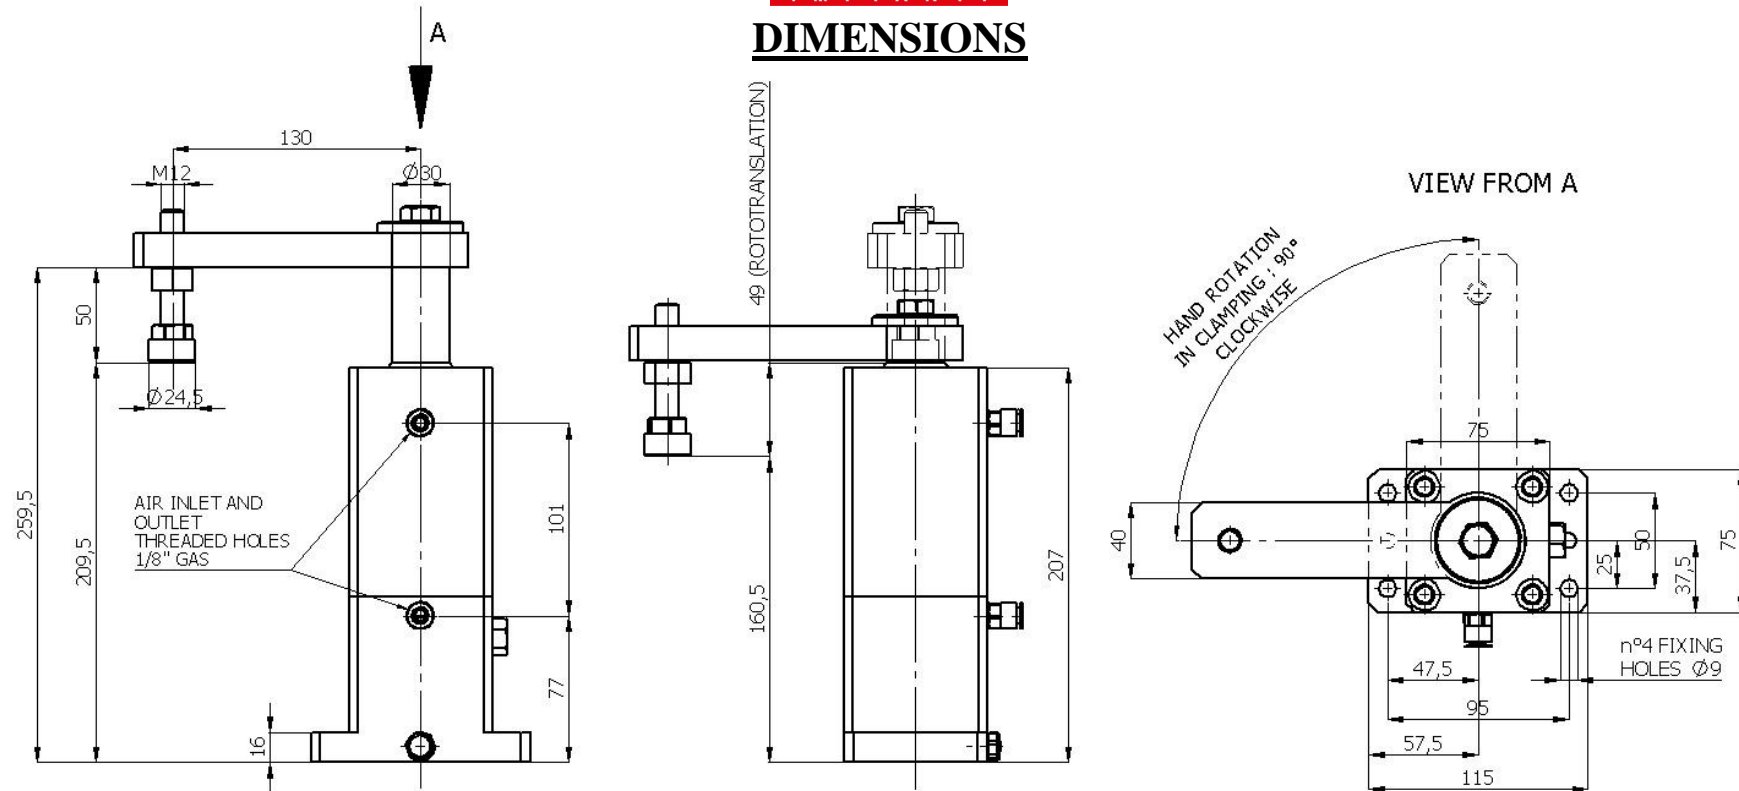


AVAILABILITY OF CUSTOM CONFIGURATIONS


Middle fixing flange
solution



Cylindrical solution with
custom ferrule



Cylindrical solution,
edited ferrule and
counterclockwise rotation



* For further technical information,
please contact our Technical Office.